




**ASME A112.4.2-2015/
CSA B45.16-15**

Personal hygiene devices for water closets

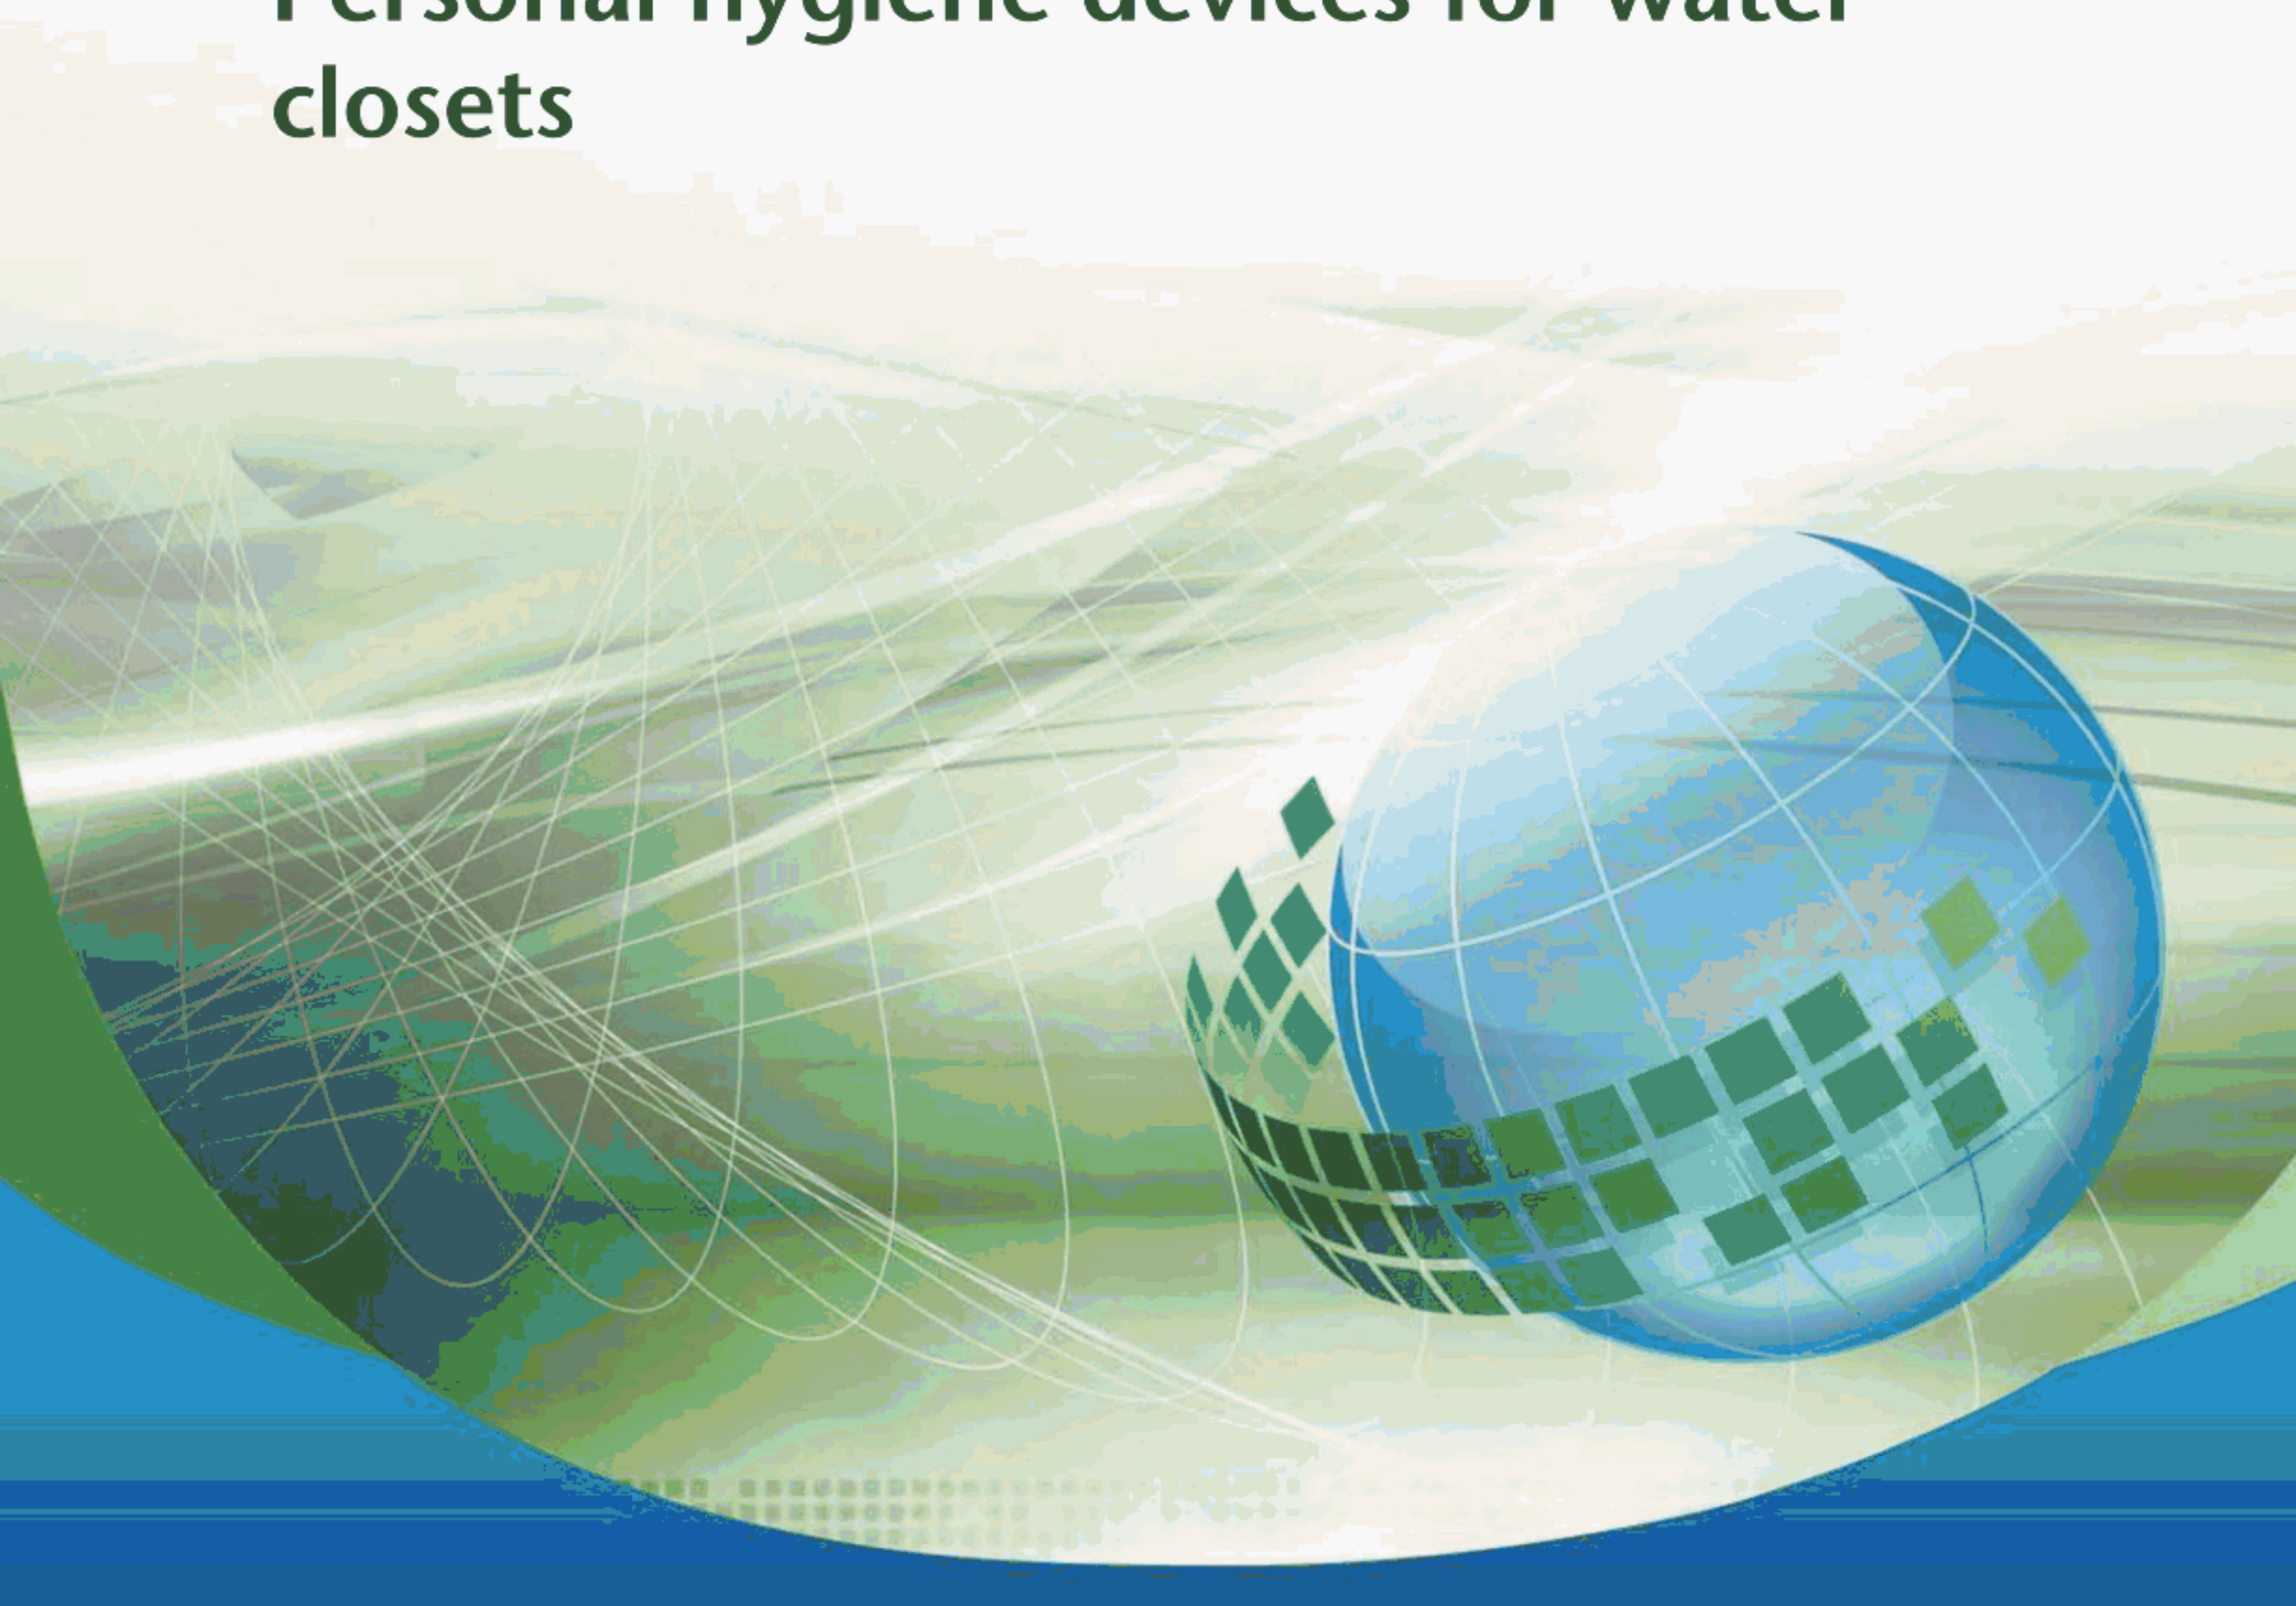

Legal Notice for Harmonized Standard Jointly Developed by ASME and CSA Group

Intellectual property rights and ownership

As between American Society of Mechanical Engineers ("ASME") and Canadian Standards Association (Operating as "CSA Group") (collectively "ASME and CSA Group") and the users of this document (whether it be in printed or electronic form), ASME and CSA Group are the joint owners of all works contained herein that are protected by copyright, all trade-marks (except as otherwise noted to the contrary), and all inventions and trade secrets that may be contained in this document, whether or not such inventions and trade secrets are protected by patents and applications for patents. The unauthorized use, modification, copying, or disclosure of this document may violate laws that protect the intellectual property of ASME and CSA Group and may give rise to a right in ASME and CSA Group to seek legal redress for such use, modification, copying, or disclosure. ASME and CSA Group reserve all intellectual property rights in this document.

Disclaimer and exclusion of liability

This document is provided without any representations, warranties, or conditions of any kind, express or implied, including, without limitation, implied warranties or conditions concerning this document's fitness for a particular purpose or use, its merchantability, or its non-infringement of any third party's intellectual property rights. ASME and CSA Group do not warrant the accuracy, completeness, or currency of any of the information published in this document. ASME and CSA Group make no representations or warranties regarding this document's compliance with any applicable statute, rule, or regulation.

IN NO EVENT SHALL ASME AND CSA GROUP, THEIR RESPECTIVE VOLUNTEERS, MEMBERS, SUBSIDIARIES, OR AFFILIATED COMPANIES, OR THEIR EMPLOYEES, DIRECTORS, OR OFFICERS, BE LIABLE FOR ANY DIRECT, INDIRECT, OR INCIDENTAL DAMAGES, INJURY, LOSS, COSTS, OR EXPENSES, HOWSOEVER CAUSED, INCLUDING BUT NOT LIMITED TO SPECIAL OR CONSEQUENTIAL DAMAGES, LOST REVENUE, BUSINESS INTERRUPTION, LOST OR DAMAGED DATA, OR ANY OTHER COMMERCIAL OR ECONOMIC LOSS, WHETHER BASED IN CONTRACT, TORT (INCLUDING NEGLIGENCE), OR ANY OTHER THEORY OF LIABILITY, ARISING OUT OF OR RESULTING FROM ACCESS TO OR POSSESSION OR USE OF THIS DOCUMENT, EVEN IF ASME OR CSA GROUP HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, INJURY, LOSS, COSTS, OR EXPENSES.

In publishing and making this document available, ASME and CSA Group are not undertaking to render professional or other services for or on behalf of any person or entity or to perform any duty owed by any person or entity to another person or entity. The information in this document is directed to those who have the appropriate degree of experience to use and apply its contents, and ASME and CSA Group accept no responsibility whatsoever arising in any way from any and all use of or reliance on the information contained in this document.

ASME and CSA Group have no power, nor do they undertake, to enforce compliance with the contents of the standards or other documents they jointly publish.

Authorized use of this document

This document is being provided by ASME and CSA Group for informational and non-commercial use only. The user of this document is authorized to do only the following:

If this document is in electronic form:

- load this document onto a computer for the sole purpose of reviewing it;
- search and browse this document; and
- print this document if it is in PDF format.

Limited copies of this document in print or paper form may be distributed only to persons who are authorized by ASME and CSA Group to have such copies, and only if this Legal Notice appears on each such copy.

In addition, users may not and may not permit others to

- alter this document in any way or remove this Legal Notice from the attached standard;
- sell this document without authorization from ASME and CSA Group ; or
- make an electronic copy of this document.

If you do not agree with any of the terms and conditions contained in this Legal Notice, you may not load or use this document or make any copies of the contents hereof, and if you do make such copies, you are required to destroy them immediately. Use of this document constitutes your acceptance of the terms and conditions of this Legal Notice.



Standards Update Service

ASME A112.4.2-2015/CSA B45.16-15 August 2015

Title: *Personal hygiene devices for water closets*

Pagination: **16 pages** (xi preliminary and 5 text), each dated **August 2015**

To register for e-mail notification about any updates to this publication

- go to **shop.csa.ca**
- click on **CSA Update Service**

The **List ID** that you will need to register for updates to this publication is **2423625**.

If you require assistance, please e-mail techsupport@csagroup.org or call 416-747-2233.

Visit CSA Group's policy on privacy at csagroup.org/legal to find out how we protect your personal information.

ASME A112.4.2-2015/CSA B45.16-15
***Personal hygiene devices for
water closets***



TMA trade-mark of the Canadian Standards Association, operating as "CSA Group"

*Published in August 2015 by CSA Group
A not-for-profit private sector organization
178 Rexdale Boulevard, Toronto, Ontario, Canada M9W 1R3
1-800-463-6727 • 416-747-4044*

Visit our Online Store at shop.csa.ca

Commitment for Amendments

This Standard is issued jointly by the American Society of Mechanical Engineers (ASME) and the Canadian Standards Association (Operating as “CSA Group”). Amendments to this Standard will be made only after processing according to the Standards writing procedures of both ASME and CSA Group.

The American Society of Mechanical Engineers
(ASME)
Three Park Avenue
New York, NY 10016-5990
USA
www.asme.org

ISBN 978-0-7918-7046-4

© Copyright 2015

The 2015 edition of this Standard is being issued with an automatic addenda subscription service. The use of addenda allows revisions made in response to public review comments or committee actions to be published as necessary.

Published in August 2015 by CSA Group
A not-for-profit private sector organization
178 Rexdale Boulevard,
Toronto, Ontario, Canada
M9W 1R3
1-800-463-6727 • 416-747-4044

Visit the CSA Online Store at shop.csa.ca

ISBN 978-1-77139-912-8

© 2015 CSA Group

All rights reserved. No part of this publication may be reproduced in any form whatsoever without the prior permission of the publisher.

Contents

ASME A112 Standards Committee on Plumbing Materials and Equipment iv

CSA Technical Committee on Plumbing Fixtures (B45) vi

CSA/ASME Harmonization Task Group on Plumbing Fixtures (B45-JHTG) ix

Preface x

1 Scope 1

2 Reference publications 1

3 Definitions 2

4 General requirements 2

- 4.1 Water closets 2
- 4.2 Backflow prevention 2
- 4.3 Electrical components 3
- 4.4 Plastic toilet seats 3
- 4.5 Bidet sprayers 3
- 4.6 Source of water 3
- 4.7 Automatic seat cover dispensers 3
- 4.8 Temperature safety device 3

5 Performance requirements and test procedures 3

- 5.1 Order of tests 3
- 5.2 Bidet spray pressure tests 3
 - 5.2.1 Flowing pressure test 3
 - 5.2.2 Static pressure test 4
- 5.3 Temperature tests 4
 - 5.3.1 Normal operating temperature test 4
 - 5.3.2 Maximum shutoff temperature for safety devices 4
- 5.4 Bidet sprayer life cycle test 4
 - 5.4.1 Test procedure 4
 - 5.4.2 Performance requirements 5
- 5.5 Atmospheric vacuum breaker test 5
 - 5.5.1 Test procedure 5
 - 5.5.2 Performance requirements 5
- 5.6 Seat cover dispenser test 5
 - 5.6.1 Test procedure 5
 - 5.6.2 Performance requirements 5
- 5.7 Bidet sprayer self-cleaning test 5
 - 5.7.1 Test procedure 5
 - 5.7.2 Performance requirements 5

6 Markings and packaging 5

ASME A112 Standards Committee on Plumbing Materials and Equipment

D.W. Viola	IAPMO, Mokena, Illinois, USA	<i>Chair</i>
S. Rawalpindiwala	Kohler Co., Kohler, Wisconsin, USA	
R.K. Adler	City of San Jose, San Jose, California, USA	
J.A. Ballanco	JB Engineering & Code Consulting, PC, Munster, Indiana, USA	
J.E. Bertrand	Moen Incorporated, North Olmsted, Ohio, USA	
A. Bonlender	Bradley Fixtures Corporation, Menomonee Falls, Wisconsin, USA	
R. Burnham	Zurn Industries LLC, Erie, Pennsylvania, USA	
M. Campos	ICC Evaluation Service, LLC, Whittier, California, USA	
S.L. Cavanaugh	Cavanaugh Consulting, Santa Fe, New Mexico, USA	
W.E. Chapin	Professional Code Consulting, LLC Cullman, Alabama, USA	
P.V. DeMarco	IAPMO, Dayton, New Jersey, USA	
N.E. Dickey	CSA Group, Cleveland, Ohio, USA	
G.S. Duren	Code Compliance, Inc., South Pasadena, Florida, USA	
R. Emmerson	Mundelein, Illinois, USA	
R.L. George	Plumb-Tech Design and Consulting Services L.L.C, Newport, Michigan, USA	
G.W. Harrison	Wayne Harrison Consulting, Edmond, Oklahoma, USA	

L. Himmelblau	Chicago Faucet Company, Des Plaines, Illinois, USA	
J.M. Koeller	Koeller and Co., Yorba Linda, California, USA	
N.M. Kummerlen	Lorain, Ohio, USA	
C.J. Lagan	American Standard Brands, Piscataway, New Jersey, USA	
J.W. Lauer	Sloan Valve Company, Huntington Beach, California, USA	
W.H. Levan	Cast Iron Soil Pipe Institute, Hixon, Georgia, USA	
D. Marbry	Fluidmaster Inc., San Juan Capistrano, California, USA	
R. Mata	CSA Group, Cleveland, Ohio, USA	
D. Orton	NSF International, Ann Arbor, Michigan, USA	
S.A. Remedios	Remedios Consulting LLC, Noblesville, Indiana, USA	
G.L. Simmons	Charlotte Pipe & Foundry, Charlotte, North Carolina, USA	
W.M. Smith	American Society of Plumbing Engineers, Montgomery, Alabama, USA	
J.C. Watson	Elkay, Broadview, Illinois, USA	
M. Weiss	Plumbing and Drainage Institute, Polson, Montana, USA	
W.C. Whitehead	Whitehead Consulting Services, Peabody, Massachusetts, USA	
A.L. Guzman	American Society of Mechanical Engineers, New York, New York, USA	<i>Secretary</i>

CSA Technical Committee on Plumbing Fixtures (B45)

S. Rawalpindiwala	Kohler Co., Kohler, Wisconsin, USA	<i>Chair</i>
F. Lemieux	Health Canada, Ottawa, Ontario, Canada	<i>Vice-Chair</i>
M. Al Hares	Delta Faucet Company, Fishers, Indiana, USA	<i>Associate</i>
W.T. Ball	Woodford Manufacturing Company, Colorado Springs, Colorado, USA	<i>Associate</i>
J.E. Bertrand	Moen Incorporated, North Olmsted, Ohio, USA	
A. Bonlender	Bradley Corporation, Menomonee Falls, Wisconsin, USA	<i>Associate</i>
T. Burke	Victoria + Albert Baths Ltd., Wombourne, West Midlands, UK	<i>Associate</i>
R. Burnham	Zurn Industries LLC, Erie, Pennsylvania, USA	
M. Campos	International Code Council, Whittier, California, USA	<i>Associate</i>
S.L. Cavanaugh	Cavanaugh Consulting, Santa Fe, New Mexico, USA	
W.E. Chapin	Professional Code Consulting, LLC, Cullman, Alabama, USA	<i>Associate</i>
S. Chen	Masco R&D, Taylor, Michigan, USA	<i>Associate</i>
N. Dickey	CSA Group, Cleveland, Ohio, USA	<i>Associate</i>
Y. Duchesne	Régie du bâtiment du Québec, Québec, Québec, Canada	
K. Ernst	Oakville Stamping & Bending Limited, Oakville, Ontario, Canada	
W. Falcomer	City of Ottawa, Ottawa, Ontario, Canada	
F. Fernández	Toto U.S.A. Inc., Ontario, California, USA	

D. Green	National Research Council Canada, Ottawa, Ontario, Canada	<i>Associate</i>
R. Hildebrand	The Regional Municipality of Waterloo, Kitchener, Ontario, Canada	
L. Himmelblau	Chicago Faucets Company, Des Plaines, Illinois, USA	
E. Ho	IAPMO Research and Testing Inc., Markham, Ontario, Canada	<i>Associate</i>
K.S. Hui	Ontario Ministry of Municipal Affairs and Housing, Toronto, Ontario, Canada	
J. Knapton	SAIT Polytechnic, Calgary, Alberta, Canada	
J. Koeller	Koeller and Company, Yorba Linda, California, USA	
N.M. Kummerlen	Lorain, Ohio, USA	
C.J. Lagan	American Standard Brands, Piscataway, New Jersey, USA	
B. Lagueux	Saint-Nicolas, Québec, Canada	
J. Manente	Region of Peel, Brampton, Ontario, Canada	<i>Associate</i>
D. Marbry	Fluidmaster Inc., San Juan Capistrano, California, USA	<i>Associate</i>
T. McCann	Department of National Defence, Ottawa, Ontario, Canada	
D. McNamara	Franke Kindred Canada Limited, Midland, Ontario, Canada	
D. Orton	NSF International, Ann Arbor, Michigan, USA	<i>Associate</i>
S.A. Remedios	Remedios Consulting LLC, Noblesville, Indiana, USA	
M. Sigler	Plumbing Manufacturers International, Rolling Meadow, Illinois, USA	<i>Associate</i>
W. Smith	American Society of Plumbing Engineers (ASPE), Montgomery, Alabama, USA	<i>Associate</i>
J. St-Denis	Intertek Testing Services NA Ltd., Lachine, Québec, Canada	<i>Associate</i>
T. Stessman	Kohler Co., Kohler, Wisconsin, USA	<i>Associate</i>

D. Stoesz	Alberta Municipal Affairs, Red Deer, Alberta, Canada	
C. Trendelman	Bargersville, Indiana, USA	<i>Associate</i>
C. Wright	Ontario Pipe Trades, Dundalk, Ontario, Canada	
L. Pilla	CSA Group, Mississauga, Ontario, Canada	<i>Project Manager</i>

CSA/ASME Harmonization Task Group on Plumbing Fixtures (B45-JHTG)

C.J. Lagan	American Standard Brands, Piscataway, New Jersey, USA	<i>Co-Chair</i>
F. Lemieux	Health Canada, Ottawa, Ontario, Canada	<i>Co-Chair</i>
M. Campos	International Code Council, Whittier, California, USA	
I. Chang	Intertek Testing Services NA Ltd., Coquitlam, British Columbia, USA	
N. Dickey	CSA Group, Independence, Ohio, USA	
K. Ernst	Oakville Stamping & Bending Limited, Oakville, Ontario, Canada	
W. Falcomer	City of Ottawa, Ottawa, Ontario, Canada	
F. Fernández	Toto U.S.A. Inc., Ontario, California, USA	
L. Himmelblau	Chicago Faucets Company Des Plaines, Illinois, USA	
E. Ho	IAPMO Research and Testing Inc., Markham, Ontario, Canada	
N. Kummerlen	Lorain, Ohio, USA	
B. Lagueux	Saint-Nicolas, Québec, Canada	
D. McNamara	Franke Kindred Canada Limited, Midland, Ontario, Canada	
S. Rawalpindiwala	Kohler Co., Kohler, Wisconsin, USA	
S. Remedios	Remedios Consulting LLC, Noblesville, Indiana, USA	
C. Wright	Ontario Pipe Trades, Dundalk, Ontario, Canada	
L. Pilla	CSA Group, Mississauga, Ontario, Canada	<i>Project Manager</i>

Preface

This is the first edition of ASME A112.4.2/CSA B45.16, *Personal hygiene devices for water closets*.

This joint Standard was developed in response to an industry request for testing that would be acceptable in both Canada and the United States. Its coverage is restricted to personal hygiene devices. Harmonized standards for plumbing fixtures made of other materials are also available or under development.

This Standard replaces the previous edition of ASME A112.4.2, *Water Closet Personal Hygiene Devices*, published in 2009 and 2003.

This Standard was prepared by the ASME/CSA Joint Harmonization Task Group on Plumbing Fixtures, under the jurisdiction of the ASME Standards Committee A112 on Plumbing Materials and Equipment and the CSA B45 Technical Committee on Plumbing Fixtures. The CSA Technical Committee operates under the jurisdiction of the CSA Strategic Steering Committee on Plumbing Products and Materials. This Standard has been formally approved by the ASME Standards Committee A112 and the CSA Technical Committee. This Standard was approved as an American National Standard by the American National Standards Institute on June 18, 2015.

ASME Notes:

- (1) *This standard was developed under procedures accredited as meeting the criteria for American National Standards and it is an American National Standard. The Standards Committee that approved the code or standard was balanced to assure that individuals from competent and concerned interests have had an opportunity to participate. The proposed Standard was made available for public review and comment that provides an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.*
- (2) *ASME does not "approve," "rate," or "endorse" any item, construction, proprietary device, or activity.*
- (3) *ASME does not take any position with respect to the validity of any patent rights asserted in connection with any items mentioned in this document, and does not undertake to insure anyone utilizing a standard against liability for infringement of any applicable letters patent, nor assume any such liability. Users of a standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, is entirely their own responsibility.*
- (4) *Participation by federal agency representative(s) or person(s) affiliated with industry is not to be interpreted as government or industry endorsement of this standard.*
- (5) *ASME accepts responsibility for only those interpretations of this document issued in accordance with the established ASME procedures and policies, which precludes the issuance of interpretations by individuals.*
- (6) *ASME issues written replies to inquiries concerning interpretation of technical aspects of this Standard. All inquiries regarding this Standard, including requests for interpretations, should be addressed to:*
Secretary, A112 Standards Committee
The American Society of Mechanical Engineers
Three Park Avenue
New York, NY 10016-5990

A request for interpretation should be clear and unambiguous. The request should

- cite the applicable edition of the Standard for which the interpretation is being requested.*
- phrase the question as a request for an interpretation of a specific requirement suitable for general understanding and use, not as a request for an approval of a proprietary design or situation. The inquirer may also include any plans or drawings, which are necessary to explain the question; however, they should not contain proprietary names or information.*

ASME procedures provide for reconsideration of any interpretation when or if additional information that might affect an interpretation is available. Further, persons aggrieved by an interpretation may appeal to the cognizant ASME Committee.

Interpretations are published on the ASME Web site under the Committee Pages at <http://www.asme.org/codes/> as they are issued.

CSA Notes:

- (1) *Use of the singular does not exclude the plural (and vice versa) when the sense allows.*
- (2) *Although the intended primary application of this Standard is stated in its Scope, it is important to note that it remains the responsibility of the users of the Standard to judge its suitability for their particular purpose.*

- (3) This publication was developed by consensus, which is defined by CSA Policy governing standardization — Code of good practice for standardization as “substantial agreement. Consensus implies much more than a simple majority, but not necessarily unanimity”. It is consistent with this definition that a member may be included in the Technical Committee list and yet not be in full agreement with all clauses of this publication.
- (4) To submit a request for interpretation of this Standard, please send the following information to inquiries@csagroup.org and include “Request for interpretation” in the subject line:
- (a) define the problem, making reference to the specific clause, and, where appropriate, include an illustrative sketch;
 - (b) provide an explanation of circumstances surrounding the actual field condition; and
 - (c) where possible, phrase the request in such a way that a specific “yes” or “no” answer will address the issue.
- Committee interpretations are processed in accordance with the CSA Directives and guidelines governing standardization and are available on the Current Standards Activities page at **standardsactivities.csa.ca**.
- (5) This Standard is subject to periodic review, and suggestions for its improvement will be referred to the appropriate committee. To submit a proposal for change, please send the following information to **inquiries@csagroup.org** and include “Proposal for change” in the subject line:
- (a) Standard designation (number);
 - (b) relevant clause, table, and/or figure number;
 - (c) wording of the proposed change; and
 - (d) rationale for the change.
- (6) Attention is drawn to the possibility that some of the elements of this Standard may be the subject of patent rights. CSA is not to be held responsible for identifying any or all such patent rights. Users of this Standard are expressly advised that determination of the validity of any such patent rights is entirely their own responsibility.

ASME A112.4.2-2015/CSA B45.16-15

Personal hygiene devices for water closets

1 Scope

1.1

This Standard covers personal hygiene devices for water closets and specifies requirements for materials, construction, performance, testing, and markings.

1.2

Products covered by this Standard include bidet sprayers and other retrofit personal hygiene devices intended

- (a) for water closets and water closet seats; and
- (b) to be used with hot and cold water or cold water only.

1.3

The provisions of this Standard are not intended to prevent the use of alternative materials or methods of construction, provided such alternatives meet the intent and requirements of this Standard.

1.4

In this Standard, "shall" is used to express a requirement, i.e., a provision that the user is obliged to satisfy in order to comply with the standard; "should" is used to express a recommendation or that which is advised but not required; and "may" is used to express an option or that which is permissible within the limits of the Standard.

Notes accompanying clauses do not include requirements or alternative requirements; the purpose of a note accompanying a clause is to separate from the text explanatory or informative material.

Notes to tables and figures are considered part of the table or figure and may be written as requirements.

Annexes are designated normative (mandatory) or informative (non-mandatory) to define their application.

1.5

SI units are the units of record in Canada. In this Standard, the inch/pound units are shown in parentheses.

The values stated in each measurement system are equivalent in application; however, each system is to be used independently. Combining values from the two measurement systems may result in non-conformance with this Standard.

All references to gallons are to U.S. gallons.

2 Reference publications

This Standard refers to the following publications, and where such reference is made, it shall be to the edition listed below, including all amendments published thereto.

ASME International/CSA Group

A112.19.2-2013/CSA B45.1-13

Ceramic plumbing fixtures

A112.19.3-2008/CSA B45.4-08 (R2013)

Stainless steel plumbing fixtures

ASSE International

1001-2008

Performance Requirements for Atmospheric Type Vacuum Breakers

CSA Group

B64 Series-11

Backflow preventers and vacuum breakers

B64.1.1-11

Atmospheric vacuum breakers (AVB)

C22.2 No. 64-10

Household cooking and liquid heating appliances

C22.2 No. 68-09 (R2014)

Motor-operated appliances (household and commercial)

CSA Group/IAPMO (International Association of Plumbing and Mechanical Officials)

CSA B45.5-11/IAPMO Z124-2011

Plastic plumbing fixtures

IAPMO (International Association of Plumbing and Mechanical Officials)

Z124.5-2013

Plastic toilet seats

UL (Underwriters Laboratories)

1431-2011

Personal Hygiene and Health Care Appliances

3 Definitions

The following definitions shall apply in this Standard:

Bidet sprayer — a component of a personal hygiene device intended for genital and perineal cleanliness, and intended for installation in water closets and water closet seats.

Note: *In this Standard, bidet sprayers are referred to as “sprayers”.*

4 General requirements

4.1 Water closets

Water closets shall comply with ASME A112.19.2/CSA B45.1, ASME A112.19.3/CSA B45.4, or CSA B45.5/IAPMO Z124, as applicable.

4.2 Backflow prevention

4.2.1

Personal hygiene devices intended for connection to the potable water supply shall be equipped with a backflow prevention device.

4.2.2

When used, atmospheric vacuum breakers shall

- (a) comply with [Clause 5.5.1](#); and
- (b) be installed with the
 - (i) critical level located not less than 25 mm (1 in) above the flood level rim; or
 - (ii) lowest point located not less than 25 mm (1 in) above the flood level rim, when the critical level is not marked.

4.3 Electrical components

Personal hygiene devices with electrical features or components shall comply with UL 1431, CSA C22.2 No. 68, or CSA C22.2 No. 64.

4.4 Plastic toilet seats

Plastic toilet seats shall comply with IAPMO/ANSI Z124.5.

4.5 Bidet sprayers

Bidet sprayers shall be

- (a) fully retractable and not subject to contamination in the retracted position, (i.e., be completely removed from the liquid and solid waste path);
- (b) self-cleaning, (i.e., have a means to rinse the bidet sprayer with water); and
- (c) concealed when not in use to prevent soiling by the user.

4.6 Source of water

The water from the water closet tank shall not be used as a source of water for the bidet sprayer.

4.7 Automatic seat cover dispensers

Automatic seat cover dispensers shall be life cycle tested in accordance with [Clause 5.6](#).

4.8 Temperature safety device

Personal hygiene devices shall be equipped with a safety device to shut off the flow of water when the temperature reaches 48 °C (118°F).

5 Performance requirements and test procedures

5.1 Order of tests

The tests shall be conducted in the order in which they appear in this Standard.

5.2 Bidet spray pressure tests

5.2.1 Flowing pressure test

5.2.1.1 Test procedure

The flowing pressure test shall be conducted as follows:

- (a) Connect the specimen to a water supply.
- (b) Increase the flowing pressure to 860 kPa (125 psi), measured at the specimen inlet.
- (c) Allow the water flow through the specimen for 5 min.
- (d) Inspect for leakage and structural damage.

5.2.1.2 Performance requirements

There shall be no leakage. Flow from the bidet sprayer shall be as intended by the manufacturer.

5.2.2 Static pressure test

5.2.2.1 Test procedure

The static pressure test shall be conducted as follows:

- (a) Set the specimen in the off position (fully closed).
- (b) Increase the static water pressure to 1720 kPa (250 psi).
- (c) Maintain the pressure for 5 min.

5.2.2.2 Performance requirements

There shall be no leakage or structural damage.

5.3 Temperature tests

5.3.1 Normal operating temperature test

5.3.1.1 Test procedure

The normal operating temperature test shall be conducted as follows:

- (a) Set the inlet flowing pressure at 345 ± 35 kPa (50 ± 5 psi).
- (b) Set the inlet temperature at 18 ± 3 °C (65 ± 5 °F).
- (c) Operate the specimen at its maximum temperature setting for 5 min.
- (d) Measure the temperature at the outlet.

5.3.1.2 Performance requirement

The water temperature at the outlet shall not exceed 43 °C (110°F).

5.3.2 Maximum shutoff temperature for safety devices

5.3.2.1 Test procedure

The maximum shutoff temperature test shall be conducted as follows:

- (a) Supply water to the specimen at an initial temperature of $41 +0/-6$ °C ($105 +0/-10$ °F).
- (b) Set the inlet flowing pressure at 345 ± 35 kPa (50 ± 5 psi) pressure.
- (c) Activate the specimen and slowly raise the temperature to 48 °C (118°F).
- (d) Increase the water temperature no faster than 0.5 °C (1°F) every 5 s.
- (e) Record the time to shut off the flow of water when the temperature reaches 48 °C (118°F).
- (f) Repeat this test following the bidet sprayer cycle test.

5.3.2.2 Performance requirements

The water flow through the specimen shall shut off within 5 s of the bidet spray discharge water temperature reaching 48 °C (118°F). Water may continue to flow from the bidet sprayer discharge as long as the temperature remains below 48 °C (118°F) and the sprayer is in the process of returning to its off position/state. The specimen shall be considered to have complied with the requirements of this Clause if water ceases to flow prior to reaching a temperature of 48 °C (118°F).

5.4 Bidet sprayer life cycle test

5.4.1 Test procedure

The life cycle test shall be conducted as follows:

- (a) Set the inlet flowing pressure at 345 ± 35 kPa (50 ± 5 psi).
- (b) Set the device to its maximum water temperature setting.
- (c) Operate the specimen 75,000 times:
 - (i) At each cycle, the bidet sprayer shall fully extend and then fully retract.
 - (ii) For specimens with multiple bidet sprayers, the anterior (front) sprayer shall be tested for 50,000 cycles and the posterior (rear) sprayer shall be tested for 25,000 cycles.

5.4.2 Performance requirements

At the end of the life cycle test, the specimen shall continue to function at the operating pressure as it did before the test. In addition, there shall be no leakage, and the flow from the bidet sprayer shall be as intended by the manufacturer.

5.5 Atmospheric vacuum breaker test

5.5.1 Test procedure

Vacuum breakers shall be tested for back siphonage in accordance with ASSE 1001 or CSA B64.1.1.

5.5.2 Performance requirements

Water in the sight tube shall not rise more than 13 mm (0.5 in).

5.6 Seat cover dispenser test

5.6.1 Test procedure

The seat cover dispenser shall be operated for 5,000 cycles. Each cycle shall consist of dispensing one seat cover.

5.6.2 Performance requirements

Failure to dispense the seat cover in 100 or more of the 5,000 cycles shall be cause for rejection. Continuous feed dispensers shall render previously dispensed seat covers unusable.

5.7 Bidet sprayer self-cleaning test

5.7.1 Test procedure

The self-cleaning test shall be conducted as follows:

- (a) Operate the bidet sprayer enough cycles to ensure that it is purged of air and filled with water at normal operating pressure and temperature.
- (b) Extend the bidet sprayer and dry it thoroughly.
- (c) Use a water-soluble marker of a contrasting colour to draw lines on the bidet sprayer as follows:
 - (i) Draw three rings around the bidet sprayer, one in the upper third of its length, one in the middle third, and one in the lower third.
 - (ii) Draw a fourth line longitudinally, along the top of the bidet sprayer from one end to the other.
- (d) Release the bidet sprayer and allow it to retract into its off position.
- (e) The bidet sprayer self-cleaning function shall be actuated two times.
- (f) Inspect and record any lines remaining.

5.7.2 Performance requirements

All of the four lines shall be washed off the bidet sprayer. Any ink lines remaining on the bidet sprayer, shall be considered a failure.

6 Markings and packaging

6.1

Personal hygiene devices complying with this Standard shall be marked with the manufacturer's name or trademark and the model number. Alternatively, the model number may be marked on the packaging.

6.2

Markings shall be permanent, legible, and visible after installation.

I S B N 978-0-7918-7046-4



CSA Group prints its publications on recycled stock, which contains 100% post-consumer fibre and is Processed Chlorine Free (PCF).



I S B N 978-1-77139-912-8