





## FOREWORD

The development of this Standard was initiated by the Striking and Struck Tools Standards Committee, consisting of technical representatives of Manufacturer members of the Hand Tools Institute (HTI). This Standard was previously numbered ANSI/HTI B173.6-1991. The American National Standards Committee B107, Socket Wrenches and Drives, under sponsorship of The American Society of Mechanical Engineers, was reorganized as an ASME Standards Committee and its title was changed to Hand Tools and Accessories. In 1996, the B173 Committee merged with the B107 Committee and the B107 Committee scope was expanded to include safety considerations.

The purposes of this Standard are to define essential safety considerations specifically applicable to bricklayers' hammers and prospecting picks, to specify test methods to evaluate performance relating to the defined safety considerations, and to indicate limitations of safe use.

A principal change in this edition of the Standard is the accepted use of pictorial safety messages.

The format of this Standard is in accordance with "A Guide to Writing ASME Codes and Standards." Requests for interpretations of the technical requirements of this Standard should be expressed in writing to the Secretary, B107 Committee, at the address below.

Suggestions for the improvement of this Standard are welcome. They should be addressed to the Secretary, ASME B107 Committee, Three Park Avenue, New York, NY, 10016-5990.

The requirements of this Standard become effective at the time of publication.

This revision was approved as an American National Standard on January 3, 2001.

## **ASME STANDARDS COMMITTEE B107**

### **Hand Tools and Accessories**

(The following is the roster of the Committee at the time of approval of this Standard.)

#### **OFFICERS**

**R. R. McCullough**, *Chair*  
**R. B. Wright**, *Vice Chair*  
**J. R. Bird**, *Secretary*

#### **COMMITTEE PERSONNEL**

**J. R. Bird**, The American Society of Mechanical Engineers  
**R. M. Byrne**, Trade Association Management, Inc.  
**J. S. Foote**, *Alternate*, Trade Association Management, Inc.  
**J. D. Davidson**, Sears Roebuck and Co.  
**A. Herskovitz**, U.S. Army ARDEC  
**H. Kimball**, Naval Air Warfare Center  
**C. M. Knapp**, CASC/LGHB  
**J. C. Marvil**, General Services Administration  
**J. M. Ster**, *Alternate*, General Services Administration  
**G. E. Olson**, Gene Olson Engineering Consultant, Ltd.  
**W. T. Pagac**, Snap-On, Inc.  
**R. W. Reynolds**, Stanley Mechanics Tools, Inc.  
**W. R. Wacker**, BAC Associates, Inc.  
**R. B. Wright**, Wright Tool Co.

#### **SUBCOMMITTEE 4 — SAFETY STANDARDS**

**G. E. Olson**, *Chair*, Gene Olson Engineering Consultant, Ltd.  
**J. Combites**, Vaughan and Bushnell  
**J. D. Davidson**, Sears Roebuck and Co.  
**W. T. Pagac**, Snap-On, Inc.

## CORRESPONDENCE WITH THE B107 COMMITTEE

*General.* ASME Standards are developed and maintained with the intent to represent the consensus of concerned interests. As such, users of this Standard may interact with the Committee by requesting interpretations, proposing revisions, and attending Committee meetings. Correspondence should be addressed to:

Secretary, B107 Standards Committee  
The American Society of Mechanical Engineers  
Three Park Avenue  
New York, NY 10016-5990

*Proposing Revisions.* Revisions are made periodically to the Standard to incorporate changes that appear necessary or desirable, as demonstrated by the experience gained from the application of the Standard. Approved revisions will be published periodically.

The Committee welcomes proposals for revisions to this Standard. Such proposals should be as specific as possible, citing the paragraph number(s), the proposed wording, and a detailed description of the reasons for the proposal, including any pertinent documentation.

*Interpretations.* Upon request, the B107 Committee will render an interpretation of any requirement of the Standard. Interpretations can only be rendered in response to a written request sent to the Secretary of the B107 Standards Committee.

The request for interpretation should be clear and unambiguous. It is further recommended that the inquirer submit his/her request in the following format:

Subject:	Cite the applicable paragraph number(s) and the topic of the inquiry.
Edition:	Cite the applicable edition of the Standard for which the interpretation is being requested.
Question:	Phrase the question as a request for an interpretation of a specific requirement suitable for general understanding and use, not as a request for an approval of a proprietary design or situation. The inquirer may also include any plans or drawings, which are necessary to explain the question; however, they should not contain proprietary names or

## CONTENTS

Foreword .....	iii
Committee Roster .....	iv
Correspondence With the B107 Committee .....	v
<b>1 General</b> .....	<b>1</b>
<b>2 Normative References</b> .....	<b>1</b>
<b>3 Definitions</b> .....	<b>2</b>
<b>4 General Requirements</b> .....	<b>2</b>
<b>5 Safety Requirements and Limitations of Use</b> .....	<b>4</b>
<b>Figures</b>	
1 Bricklayer's Hammer .....	3
2 Prospecting Pick .....	3
3 Typical Static Force Test .....	5
<b>Table</b>	
1 Chemical Properties of Steel Blades .....	4

## CONTENTS

Foreword .....	iii
Committee Roster .....	iv
Correspondence With the B107 Committee .....	v
<b>1 General .....</b>	<b>1</b>
<b>2 Normative References .....</b>	<b>1</b>
<b>3 Definitions .....</b>	<b>2</b>
<b>4 General Requirements .....</b>	<b>2</b>
<b>5 Safety Requirements and Limitations of Use .....</b>	<b>4</b>
<b>Figures</b>	
1 Bricklayer's Hammer .....	3
2 Prospecting Pick .....	3
3 Typical Static Force Test .....	5
<b>Table</b>	
1 Chemical Properties of Steel Blades .....	4

*blade:* the tapered portion of the bricklayers' hammer-head directly opposite the face.

*chamfer:* the angled flat surface or equivalent radius encircling the perimeter of the face of the bricklayers' hammer and prospecting picks and at both ends of the cutting edge of the bricklayers' hammer.

*cheeks:* see *sides*.

*cutting edge (bit):* the edge directly opposite the face of the bricklayers' hammerhead at the extreme end of the blade.

*eye:* an opening or aperture in the bricklayers' hammer or prospecting pick located between the blade or pick and the face into which the handle is inserted if the handle is separate.

*face:* the portion of the bricklayers' hammerhead or prospecting pick head, exclusive of the bell and chamfer, located on the end of the head opposite from the blade or pick end.

*handle:* the portion that protrudes from the hammer-head or pick head and by which the tool is held.

*handle grip:* material securely attached to the grip end of some styles of hammer or pick handles.

*hardness:* the condition of the hammerhead or pick head resulting from heat treatment.

*neck:* on some bricklayers' hammers of alternative design (see Fig. 1), the portion of the hammerhead between the bell and the hammer eye.

*pick:* the portion of the prospecting pick directly opposite the face.

*safety message:* the information imprinted on or affixed to the hammer that is intended to promote safety.

*sides:* outside surfaces of the hammer-head, on either side of the eye, located between the blade and chamfer or neck on bricklayers' hammers and the pick end and chamfer on prospecting picks; also called *cheeks*.

*top of hammer or pick:* the portion of the hammer or prospecting pick head opposite the handle entry.

tile, concrete tile, and concrete blocks and for chipping mortar from bricks. Prospecting picks shall have a face on one end of the head and a pick on the opposite end of the head for use in pulling samples from the ground.

**4.1.1** The faces of the heads shall be flat.

**4.1.2** The faces shall have a chamfer of 45 deg (or equivalent radius) all around the perimeter with the width equal to approximately 0.06 in. (1.5 mm).

**4.1.3** The underside of the cutting edge or bit of the bricklayers' hammer shall have a bevel of approximately 30 deg to 45 deg. The two outer corners of the cutting edge shall have a chamfer of approximately 45 deg or equivalent radius.

**4.1.4** Handles shall be of any design, including ergonomic, that can withstand the tests specified in paras. 4.4.3 and 4.4.4.

**4.1.5** The head and handle shall be free of nonfunctional sharp edges, points, and surface roughness that could inflict personal injury on the user while handling the bricklayers' hammer or prospecting pick.

## 4.2 Materials

**4.2.1** Heads shall be made from special-quality, fine-grain, hot-rolled, carbon steel bars conforming to the chemical requirements specified in Table 1 and to ASTM A 576 or from an equivalent material such as alloy steel conforming to ASTM A 322 or ASTM A 681.

**4.2.2** Heads shall be free of manufacturing and material defects, such as seams, laps, pipes, and cold shuts that could jeopardize sound construction. They shall conform to requirements for mechanical properties specified in para. 4.3 and shall withstand the striking test specified in para. 4.4.3.

**4.2.3** Handles shall be made of any suitable material that will withstand the test requirements in paras. 4.4.3



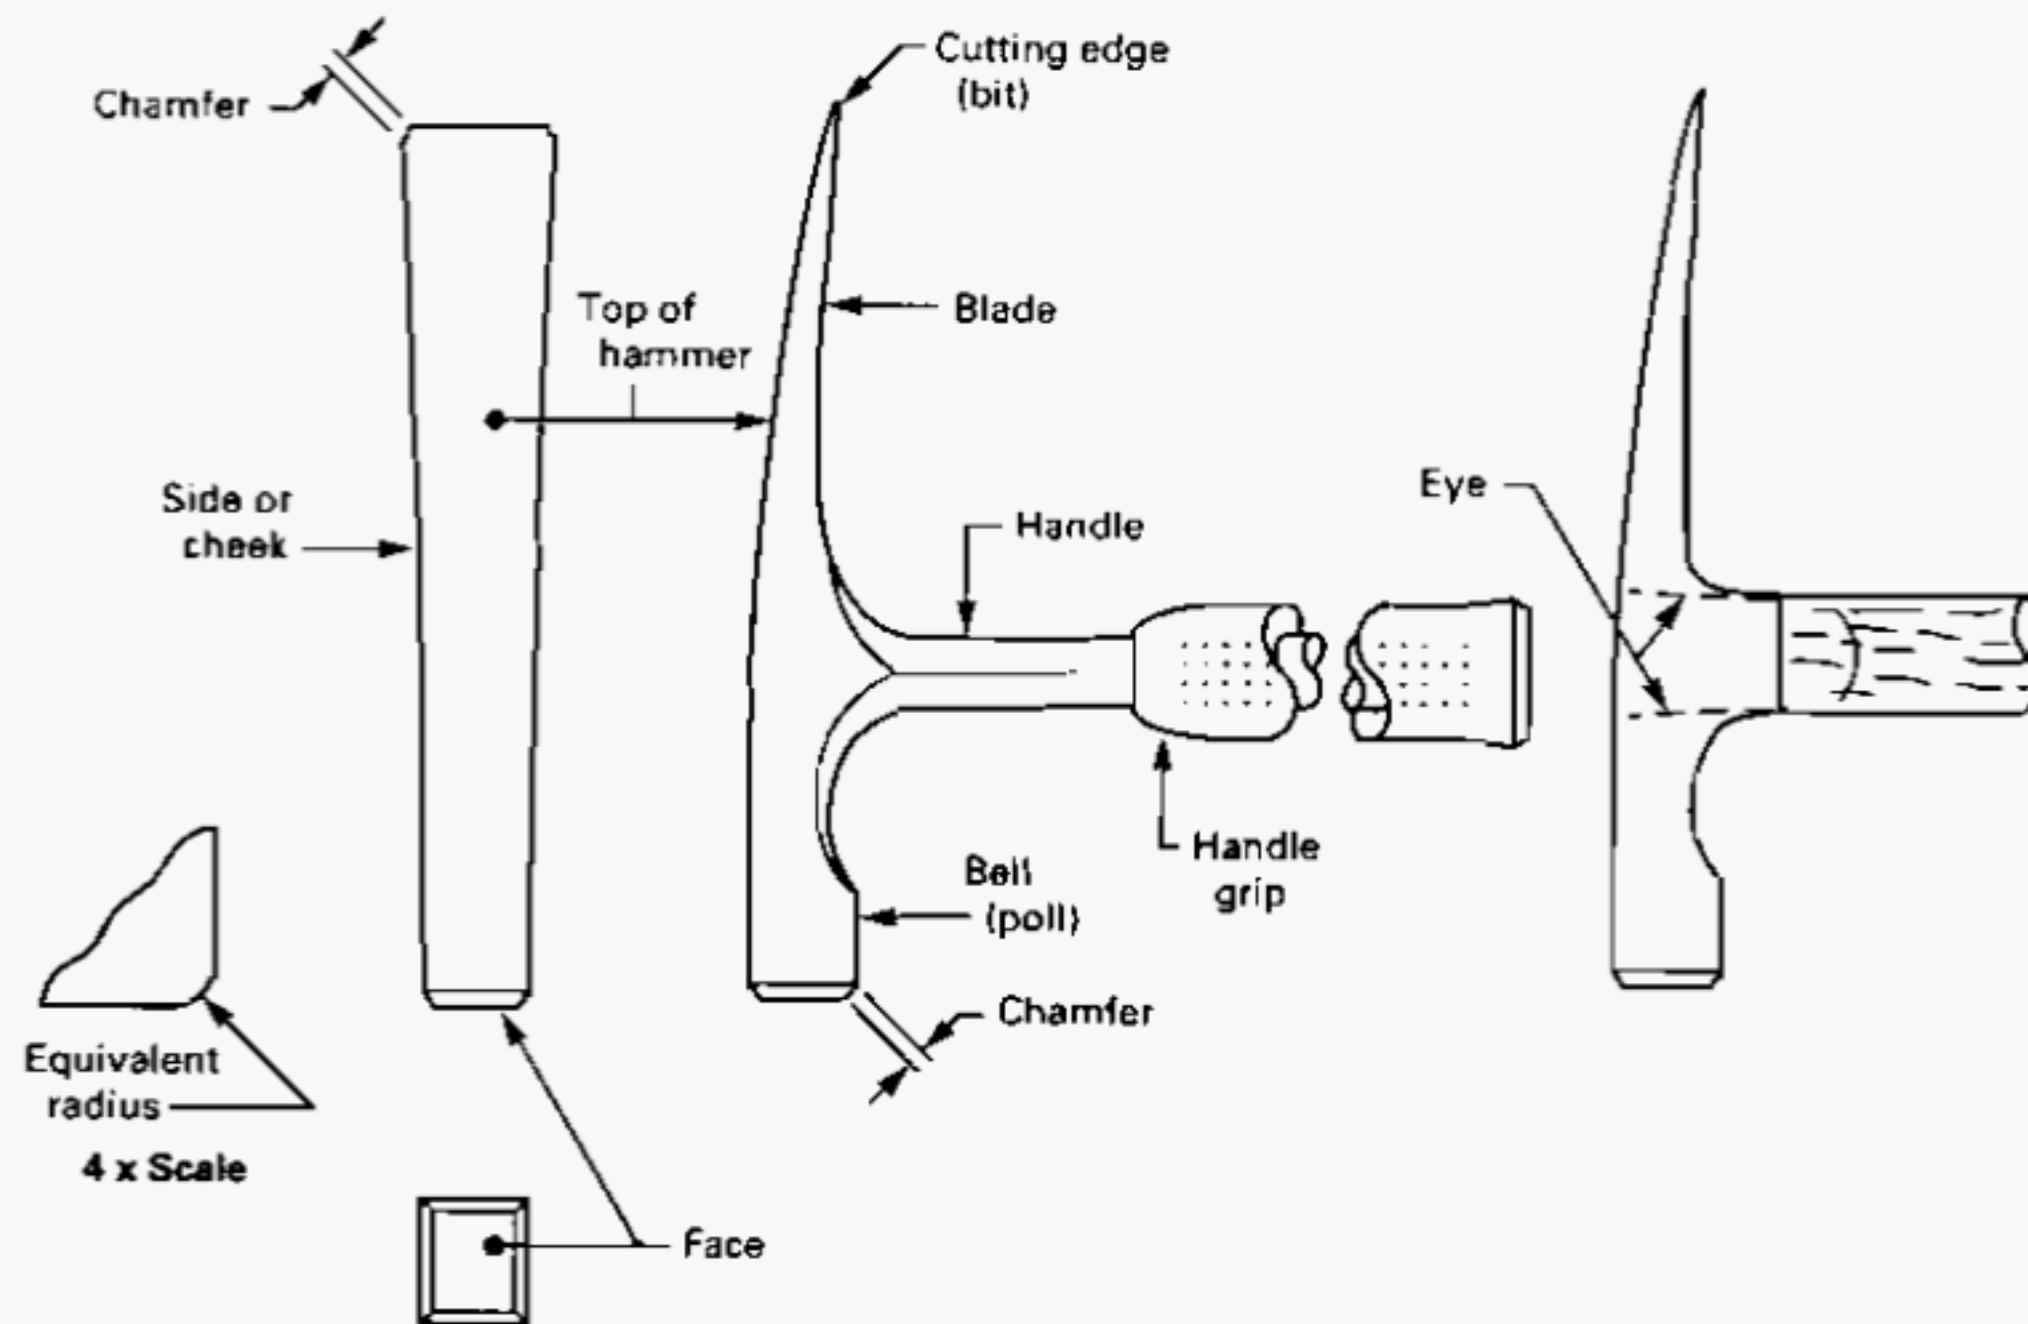


FIG. 1 BRICKLAYER'S HAMMER

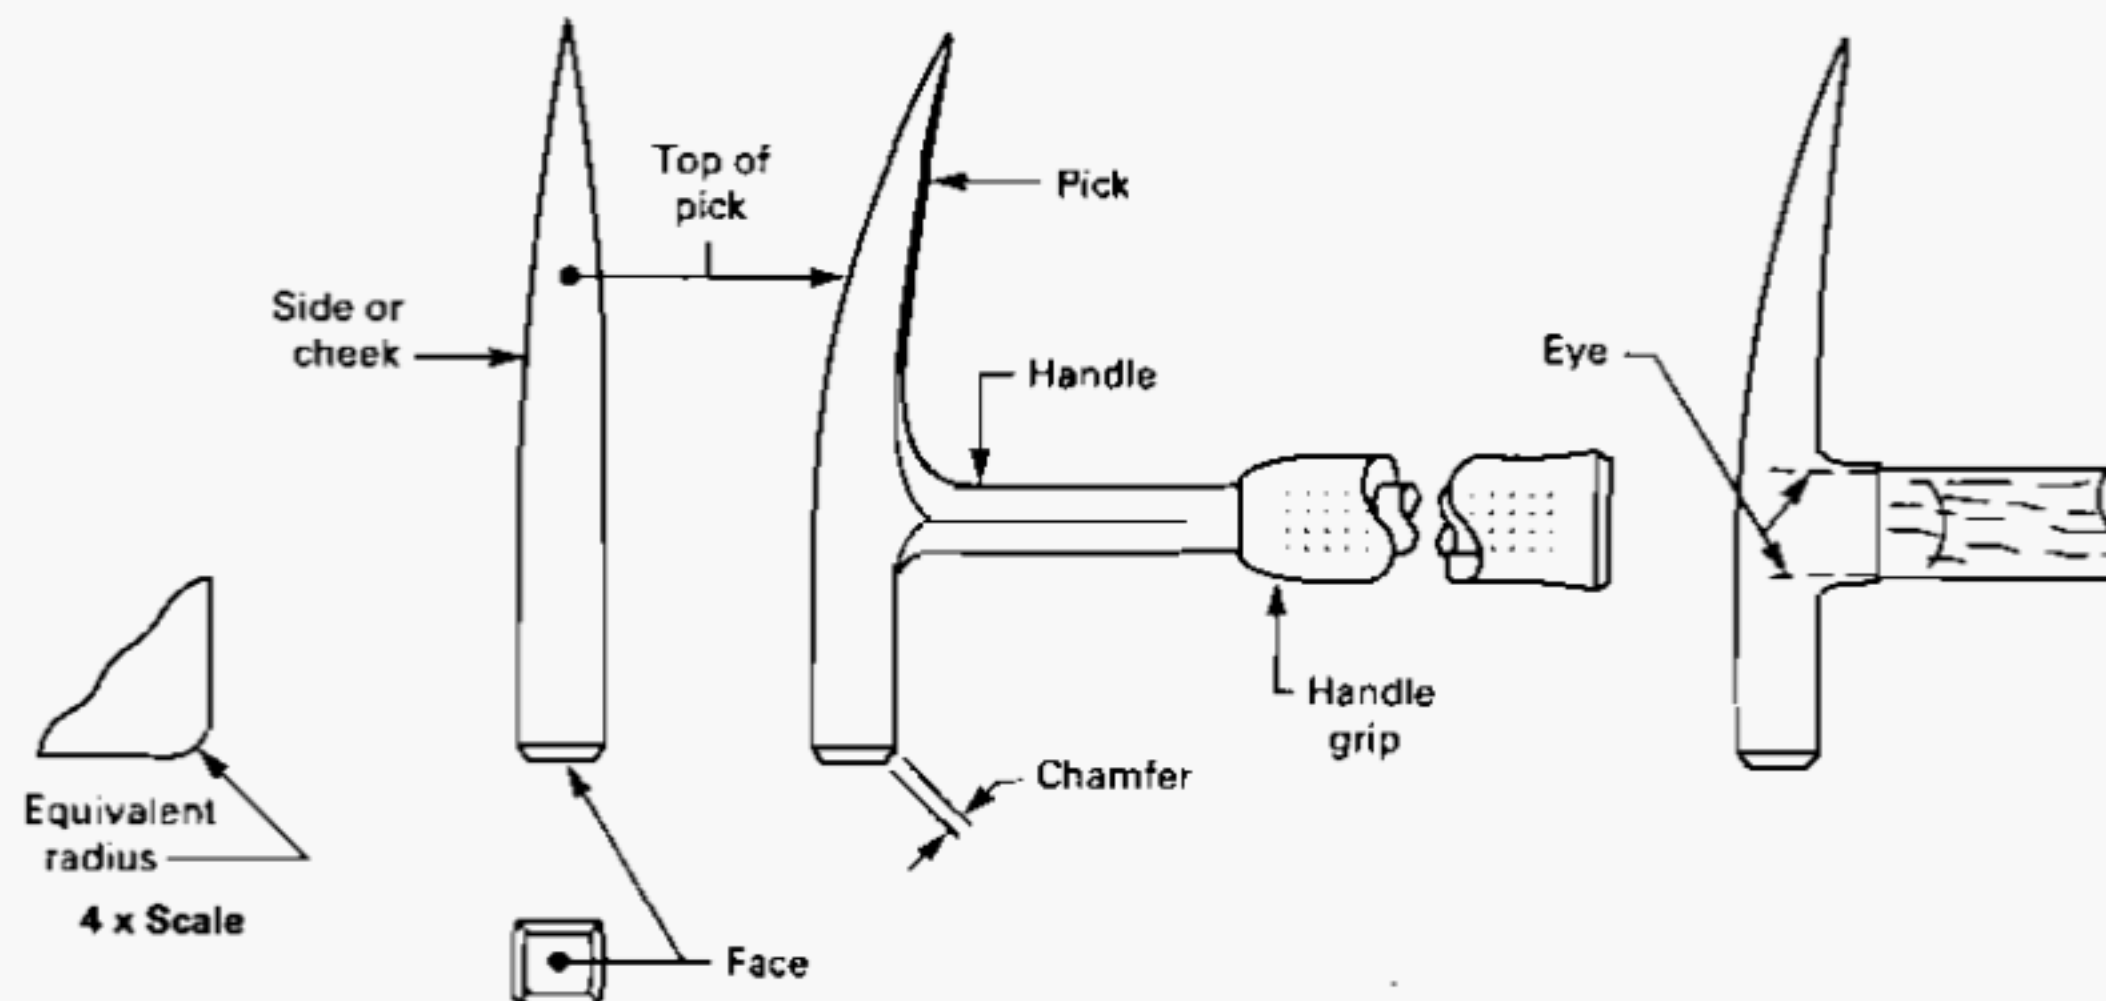


FIG. 2 PROSPECTING PICK

**TABLE 1 CHEMICAL PROPERTIES OF STEEL  
BLADES**

Element	Required Percentage of Element	
	Min.	Max.
Carbon	0.45	0.88
Manganese	0.30	1.20
Phosphorus	...	0.04
Sulfur	...	0.05
Silicon	...	0.35

**4.3.2** The blade of the bricklayers' hammer and the pick end of the prospecting pick shall be hardened to a hardness of 45 HRC to 60 HRC or equivalent for a minimum length of 0.75 in. (19.1 mm) from the bit end and the pick end, respectively.

**4.3.3** The face, blade, and pick end shall not sink, mushroom, chip, crack, or spall when subjected to the striking test specified in para. 4.4.3.

**4.3.4** Handles shall not loosen or separate from the head, crack, or break when subjected to the tests specified in paras. 4.4.3 and 4.4.4.

#### 4.4 Tests

Many tests required herein are inherently hazardous and adequate safeguards for personnel and property shall be employed in conducting such tests.

**4.4.1 General.** Sample bricklayers' hammers and prospecting picks shall be tested and shall conform to the requirements of all applicable tests specified in paras. 4.4.2 through 4.4.4. Separate (new) samples shall be used for each of the tests. Failure to meet the requirements of any of the tests indicates the bricklayer's hammer or prospecting pick is not in compliance with this Standard.

**4.4.2 Hardness Determination Test.** Hardness determination with respect to faces, blades, and picks shall be made on a mounted or unmounted specimen that has been cut from the tool using the wet abrasive or other equivalent method. Any hardness test will be acceptable that utilizes equipment and methods equivalent to Rockwell hardness determination as specified in ASTM E 18.

**4.4.3 Striking and Tensile Force Test.** Prior to tensile force testing, sample tools shall be subjected to the following striking test. The tools shall receive 20 full swinging blows by a person of average build,

160 lb to 180 lb (73 kg to 82 kg) or mechanical equivalent, commensurate with the end use and weight of the tool<sup>1</sup> against the smooth, slightly convex surface of a rigidly supported steel object with a minimum diameter of 3.0 in. (76 mm) and a minimum length of 2.0 in. (51 mm), the hardness of which shall be equivalent to a hardness of 92 HRB to 105 HRB or equivalent.

Following the striking test, assemblies consisting of two or more separate parts (head and handle) shall not loosen or separate when subjected to the static tensile forces specified:

(a) 400 lbf (1,780 N) on tools with head weights of less than 20 oz (567 g);

(b) 1,000 lbf (4,448 N) on tools with head weights of 20 oz (567 g) and greater.

**4.4.4 Static Force Test.** Samples of the assembled tool handles shall not break, loosen, or otherwise fail when subjected to the loads specified in paras. 4.4.4.1 or 4.4.4.2, depending on the head weight, when

(a) the tool head is locked securely in the test fixture with the face down and the handle extended in the horizontal plane;

(b) a static force is applied vertically at a point on the handle measuring 10 in. (254 mm) from the top of the tool head. (See Fig. 3.)

**4.4.4.1** Tools with head weights of less than 20 oz (567 g) shall withstand a static force of 80 lbf (356 N).

**4.4.4.2** Tools with a head weight of 20 oz (567 g) and greater shall withstand a static force of 100 lbf (445 N).

## 5 SAFETY REQUIREMENTS AND LIMITATIONS OF USE

(a) To avoid possible eye or other bodily injury, bricklayers' hammers and prospecting picks shall be used only for the purposes specified in para. 1.1 and shall not be used to strike hard or hardened objects such as masonry nails, brick chisels or sets, hatchets, axes, splitting wedges, mauls, other hammers, and other steel tools or be struck by any striking tool or other hardened object.

(b) Safety goggles or equivalent eye protection conforming to ANSI Z87.1 shall be worn by the user and by all persons in the immediate area in which a

<sup>1</sup> The tool face is flat. Thus the struck surface should be convex. Striking flat surface against flat surface should be avoided.

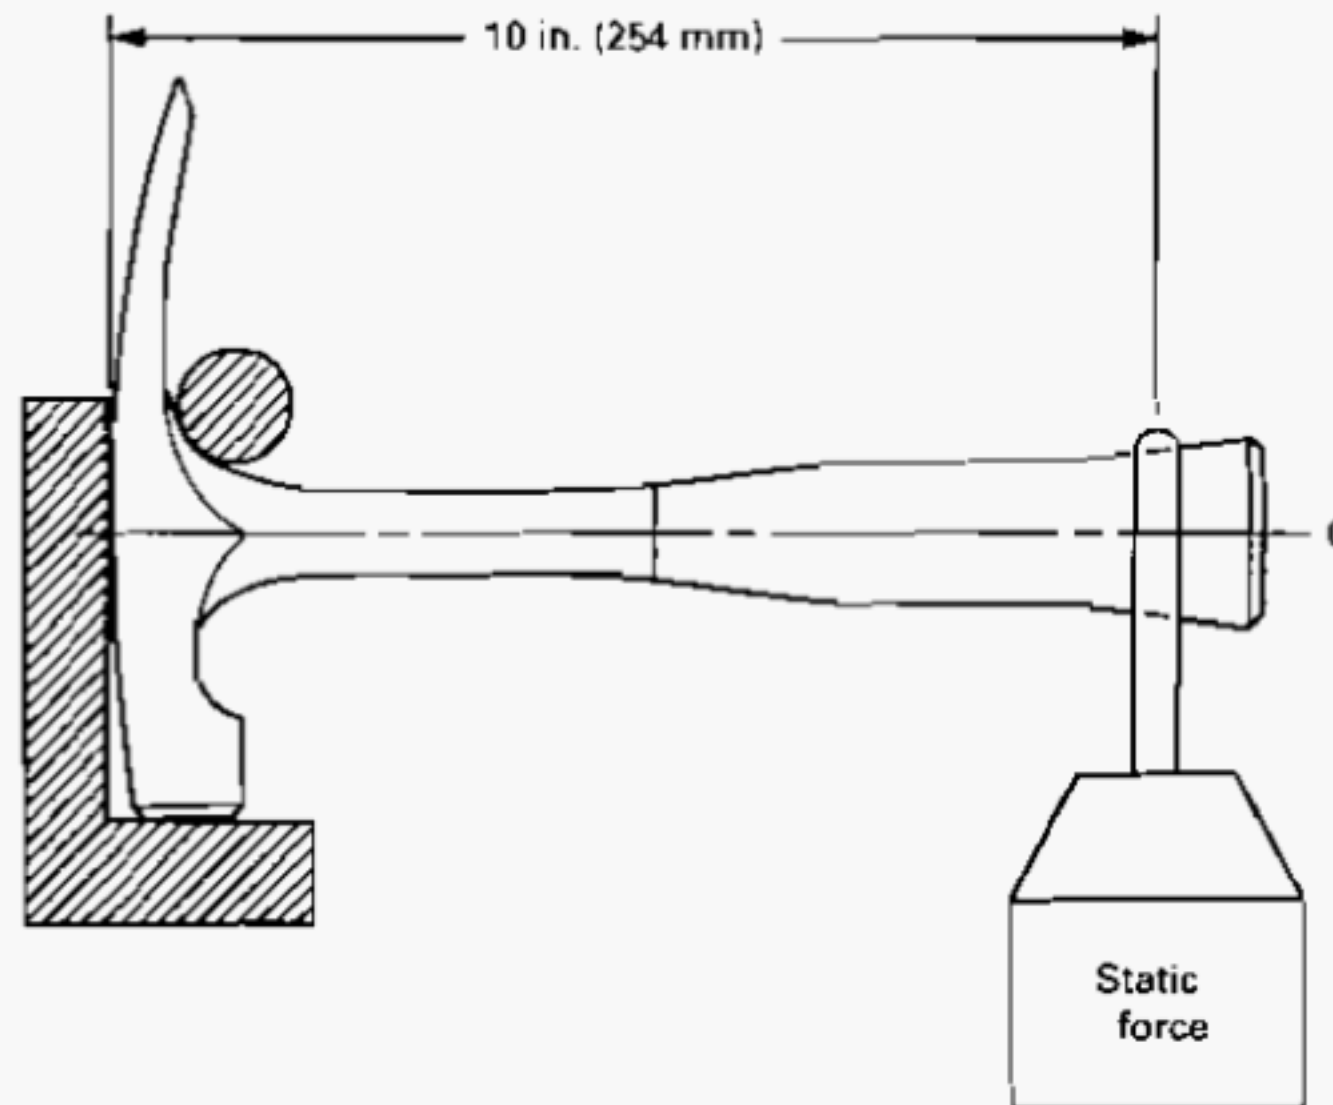


FIG. 3 TYPICAL STATIC FORCE TEST

bricklayers' hammer or prospecting pick or any striking tool is being used to avoid injury from possible flying objects.

(c) Tool heads shall be inspected prior to each use and their use discontinued at the first sign of chipping, mushrooming, or cracking of any portion.

(d) No area, section, or portion of the head of a bricklayer's hammer or prospecting pick shall be ground, welded, treated by reheating, or otherwise altered from the original condition as furnished by the manufacturer except that a dull cutting edge or pick end may be redressed to its original contour using a hand file or whetstone.

(e) Handles shall be inspected prior to each use and damaged handles shall be replaced. Handles shall be free of splinters or cracks and shall be kept tight in the head of the tool. Replacements shall withstand the test requirements specified in paras. 4.4.3 and 4.4.4 and shall be equivalent to the original handle in size and quality.

(f) When provided, handle grips that have loosened from the handle shall be tightened or replaced.

(g) Instructors or employers or both shall stress proper use and safety in the use of bricklayers' hammers and prospecting picks and shall emphasize the necessity to wear and ensure the use of safety goggles or equivalent eye protection. The publication *Guide to Hand Tools — Selection, Safety Tips, Proper Use and Care* provides guidelines for safe use of these tools.

(h) Each bricklayer's hammer or prospecting pick shall be stamped, labeled, or otherwise marked by the manufacturer with the following safety message and symbols or equivalent:



**WARNING**  
**WEAR SAFETY GOGGLES**  
**USER AND BYSTANDER**

This safety message shall be located in a position that will not interfere with the quality or performance of the tool.

The above safety message shall also appear on all replacement handles.

Pictorials are an accepted equivalent. The principles set forth in ANSI Z535.4 shall be used as the guide for alternative, equivalent methods of labeling.

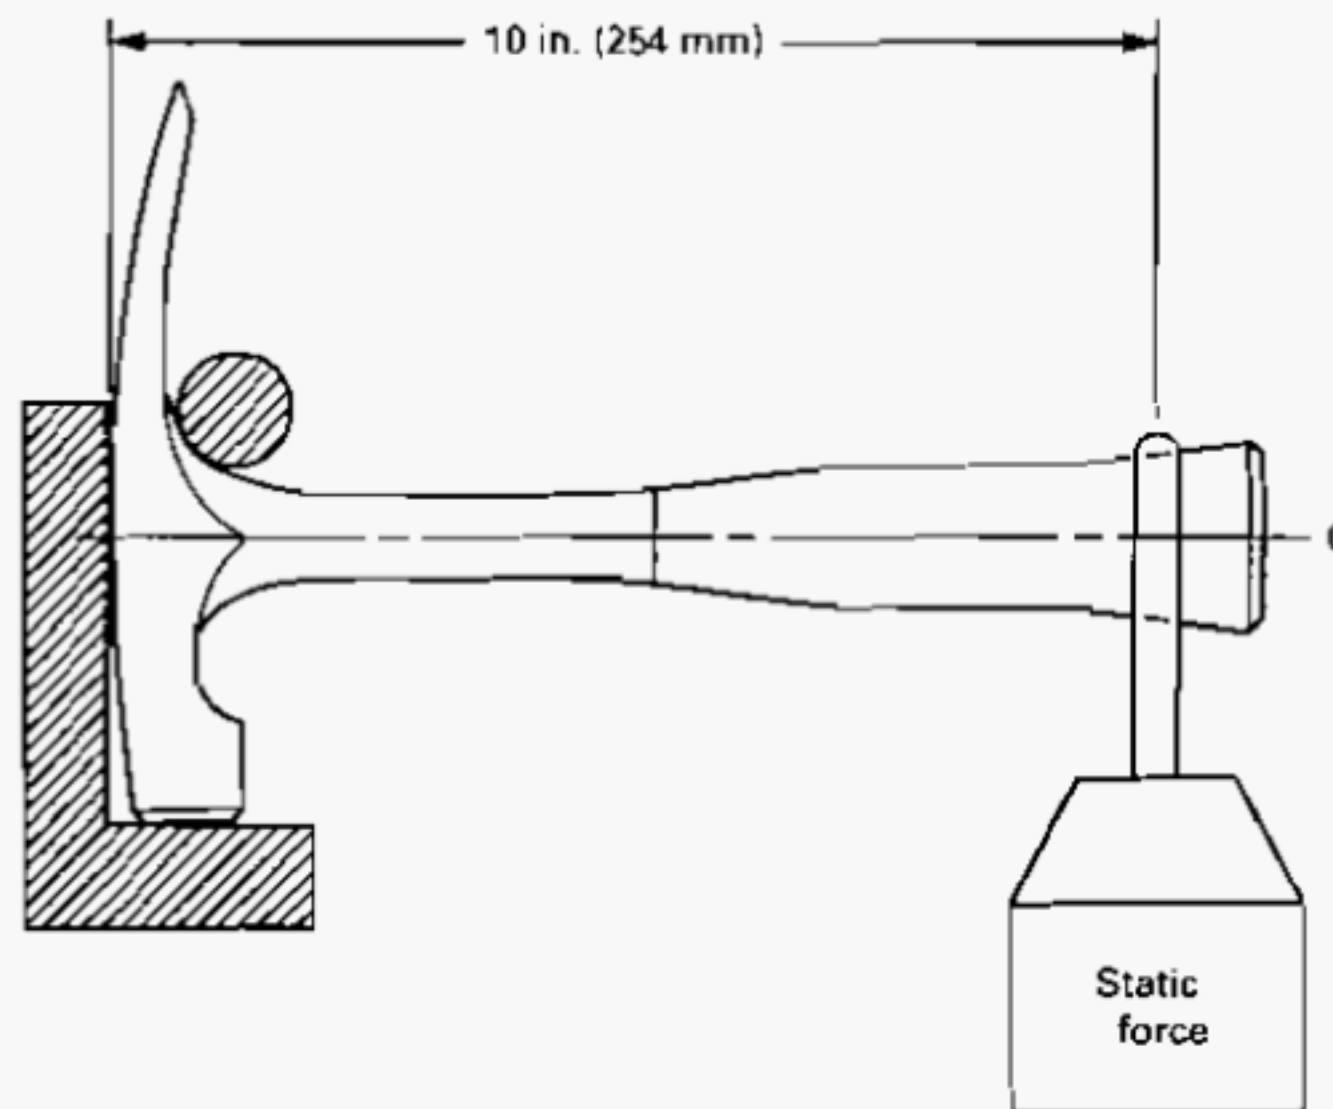


FIG. 3 TYPICAL STATIC FORCE TEST

bricklayers' hammer or prospecting pick or any striking tool is being used to avoid injury from possible flying objects.

(c) Tool heads shall be inspected prior to each use and their use discontinued at the first sign of chipping, mushrooming, or cracking of any portion.

(d) No area, section, or portion of the head of a bricklayer's hammer or prospecting pick shall be ground, welded, treated by reheating, or otherwise altered from the original condition as furnished by the manufacturer except that a dull cutting edge or pick end may be redressed to its original contour using a hand file or whetstone.

(e) Handles shall be inspected prior to each use and damaged handles shall be replaced. Handles shall be free of splinters or cracks and shall be kept tight in the head of the tool. Replacements shall withstand the test requirements specified in paras. 4.4.3 and 4.4.4 and shall be equivalent to the original handle in size and quality.

(f) When provided, handle grips that have loosened from the handle shall be tightened or replaced.

(g) Instructors or employers or both shall stress proper use and safety in the use of bricklayers' hammers and prospecting picks and shall emphasize the necessity to wear and ensure the use of safety goggles or equivalent eye protection. The publication *Guide to Hand Tools — Selection, Safety Tips, Proper Use and Care* provides guidelines for safe use of these tools.

(h) Each bricklayer's hammer or prospecting pick shall be stamped, labeled, or otherwise marked by the manufacturer with the following safety message and symbols or equivalent:



**WARNING**  
**WEAR SAFETY GOGGLES**  
**USER AND BYSTANDER**

This safety message shall be located in a position that will not interfere with the quality or performance of the tool.

The above safety message shall also appear on all replacement handles.

Pictorials are an accepted equivalent. The principles set forth in ANSI Z535.4 shall be used as the guide for alternative, equivalent methods of labeling.